



2026 PRODUCT RANGE

PRODUCT CATALOG

59 truck-mounted crane & lift models
across four product lines.

BUILT TO OUTLAST.


US-unit technical data sheets - Application review support

Porter, Texas - outlastcrane.com - (832) 817-2904



TKA 4.700

Outlast Brazilian Boom

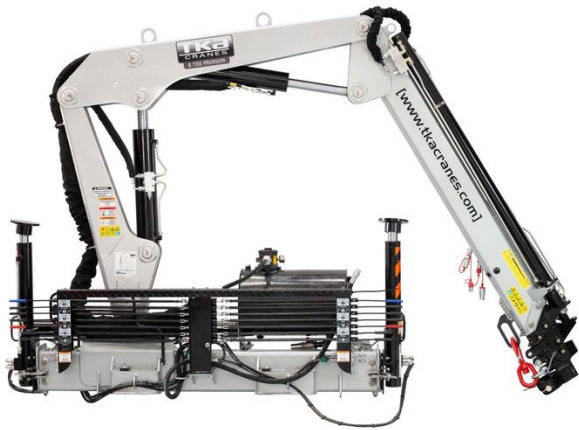

5,950 lb

MAXIMUM RATED CAPACITY

23.3 ft Maximum horizontal reach**32.2 ft** Maximum vertical reach**8,820 lb** Min. vehicle GVW for install

SPECIFICATION	US UNITS	METRIC
Maximum lifting capacity	5,950 lb	2,700 kg
Hydraulic extensions	3	-
Maximum vertical reach	32.2 ft	9.8 m
Maximum horizontal reach	23.3 ft	7.1 m
Hydraulic vertical reach	27.2 ft	8.3 m
Hydraulic horizontal reach	18.7 ft	5.7 m
Front outrigger spread	10.8 ft	3.3 m
Lifting angle	85°	-
Slewing angle	370°	-
Slewing torque	6,940 ft·lbf	0.96 tf·m
Working pressure	3,480 psi	240 bar
Hydraulic oil capacity	9.2 gal	35 L
Transport footprint	2.3 ft	0.7 m
Min. vehicle GVW for install	8,820 lb	4,000 kg
Crane weight (by configuration)	1,590–1,630 lb	720–740 kg

Need rated capacities at reach?


Capacity changes with reach. Request the certified load chart and a fitment review for your truck before purchase.

(832) 817-2904 • sales@outlastcrane.com • outlastcrane.com



TKA 8.700

Outlast Brazilian Boom

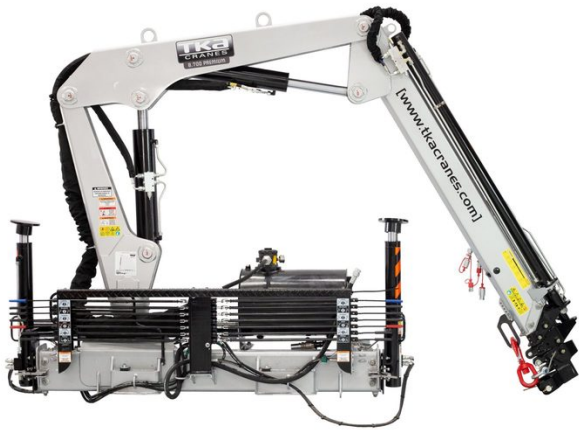

8,690 lb

MAXIMUM RATED CAPACITY

33.5 ft Maximum horizontal reach**44.3 ft** Maximum vertical reach**15,430 lb** Min. vehicle GVW for install

SPECIFICATION	US UNITS	METRIC
Maximum lifting capacity	8,690 lb	3,940 kg
Hydraulic extensions	6	-
Maximum vertical reach	44.3 ft	13.5 m
Maximum horizontal reach	33.5 ft	10.2 m
Hydraulic vertical reach	38.7 ft	11.8 m
Hydraulic horizontal reach	26.9 ft	8.2 m
Front outrigger spread	10.8 ft	3.3 m
Lifting angle	81°	-
Slewing angle	370°	-
Slewing torque	6,940 ft·lbf	0.96 tf·m
Working pressure	3,770 psi	260 bar
Hydraulic oil capacity	15.9 gal	60 L
Transport footprint	2.3 ft	0.7 m
Min. vehicle GVW for install	15,430 lb	7,000 kg
Crane weight (by configuration)	2,340–2,670 lb	1,060–1,210 kg

Need rated capacities at reach?


Capacity changes with reach. Request the certified load chart and a fitment review for your truck before purchase.

(832) 817-2904 • sales@outlastcrane.com • outlastcrane.com



TKA 10.700

Outlast Brazilian Boom

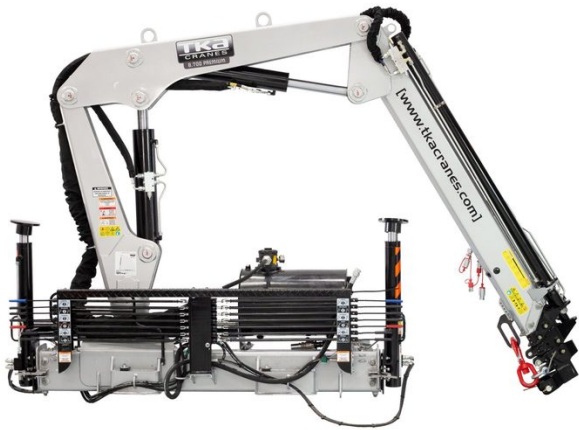

11,460 lb

MAXIMUM RATED CAPACITY

36.7 ft Maximum horizontal reach**47.6 ft** Maximum vertical reach**24,250 lb** Min. vehicle GVW for install

SPECIFICATION	US UNITS	METRIC
Maximum lifting capacity	11,460 lb	5,200 kg
Hydraulic extensions	7	-
Maximum vertical reach	47.6 ft	14.5 m
Maximum horizontal reach	36.7 ft	11.2 m
Hydraulic vertical reach	37.7 ft	11.5 m
Hydraulic horizontal reach	27.2 ft	8.3 m
Front outrigger spread	12.5 ft	3.8 m
Lifting angle	85°	-
Slewing angle	360°	-
Slewing torque	9,040 ft·lbf	1.25 tf·m
Working pressure	3,480 psi	240 bar
Hydraulic oil capacity	15.9 gal	60 L
Transport footprint	3.0 ft	0.9 m
Min. vehicle GVW for install	24,250 lb	11,000 kg
Crane weight (by configuration)	2,800–3,120 lb	1,270–1,415 kg

Need rated capacities at reach?


Capacity changes with reach. Request the certified load chart and a fitment review for your truck before purchase.

(832) 817-2904 • sales@outlastcrane.com • outlastcrane.com



TKA 12.700

Outlast Brazilian Boom

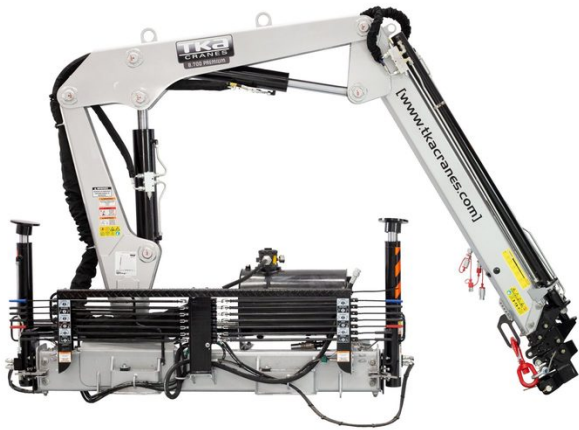

14,080 lb

MAXIMUM RATED CAPACITY

37.1 ft Maximum horizontal reach**47.6 ft** Maximum vertical reach**24,250 lb** Min. vehicle GVW for install

SPECIFICATION	US UNITS	METRIC
Maximum lifting capacity	14,080 lb	6,385 kg
Hydraulic extensions	7	-
Maximum vertical reach	47.6 ft	14.5 m
Maximum horizontal reach	37.1 ft	11.3 m
Hydraulic vertical reach	37.7 ft	11.5 m
Hydraulic horizontal reach	27.6 ft	8.4 m
Front outrigger spread	15.7 ft	4.8 m
Lifting angle	85°	-
Slewing angle	360°	-
Slewing torque	16,420 ft·lbf	2.27 tf·m
Working pressure	4,060 psi	280 bar
Hydraulic oil capacity	21.1 gal	80 L
Transport footprint	3.0 ft	0.9 m
Min. vehicle GVW for install	24,250 lb	11,000 kg
Crane weight (by configuration)	3,260–3,650 lb	1,480–1,655 kg

Need rated capacities at reach?


Capacity changes with reach. Request the certified load chart and a fitment review for your truck before purchase.

(832) 817-2904 • sales@outlastcrane.com • outlastcrane.com



TKA 16.700

Outlast Brazilian Boom

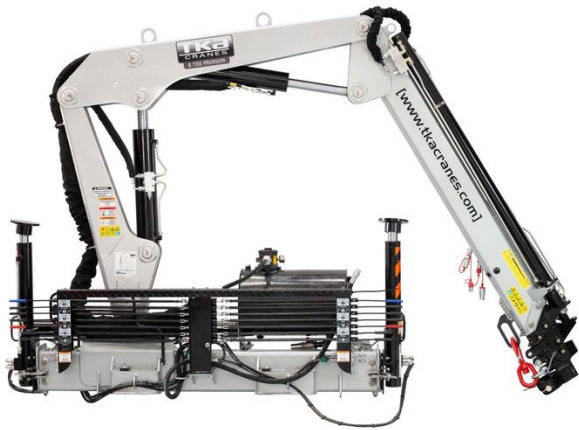

17,970 lb

MAXIMUM RATED CAPACITY

51.5 ft Maximum horizontal reach**61.7 ft** Maximum vertical reach**28,660 lb** Min. vehicle GVW for install

SPECIFICATION	US UNITS	METRIC
Maximum lifting capacity	17,970 lb	8,150 kg
Hydraulic extensions	8	-
Maximum vertical reach	61.7 ft	18.8 m
Maximum horizontal reach	51.5 ft	15.7 m
Hydraulic vertical reach	48.2 ft	14.7 m
Hydraulic horizontal reach	37.7 ft	11.5 m
Front outrigger spread	17.7 ft	5.4 m
Lifting angle	80°	-
Slewing angle	360°	-
Slewing torque	21,120 ft·lbf	2.92 tf·m
Working pressure	3,770 psi	260 bar
Hydraulic oil capacity	26.4 gal	100 L
Transport footprint	3.3 ft	1.0 m
Min. vehicle GVW for install	28,660 lb	13,000 kg
Crane weight (by configuration)	4,820–5,350 lb	2,185–2,425 kg

Need rated capacities at reach?


Capacity changes with reach. Request the certified load chart and a fitment review for your truck before purchase.

(832) 817-2904 • sales@outlastcrane.com • outlastcrane.com



TKA 16.900

Outlast Brazilian Boom

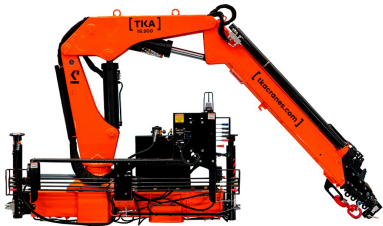

8,760 lb

MAXIMUM RATED CAPACITY

51.5 ft Maximum horizontal reach**61.7 ft** Maximum vertical reach**28,660 lb** Min. vehicle GVW for install

SPECIFICATION	US UNITS	METRIC / REFERENCE
Maximum lifting capacity	8,760 lb	3,975 kg
Published own weight	5,350 lb	2,425 kg
Boom configuration	Standard	-
Hydraulic extensions	4	—
Manual extensions	2	—
Maximum vertical reach	61.7 ft	18.80 m
Maximum horizontal reach	51.5 ft	15.70 m
Front stabilizer spread	17.7 ft	See load chart
Boom elevation angle	80°	—
Slewing angle	360°	—
Slewing torque	21,110 ft·lbf	28.62 kN·m
Maximum operating pressure	3,771 psi	260 bar
Hydraulic oil capacity	26.4 gal	100 L
Installation footprint	3.3 ft	1.00 m
Minimum vehicle GVW	28,660 lb	13,000 kg

Need rated capacities at reach?


Capacity changes with reach. Request the certified load chart and a fitment review for your truck before purchase.

(832) 817-2904 · sales@outlastcrane.com · outlastcrane.com



TKA 20.700

Outlast Brazilian Boom

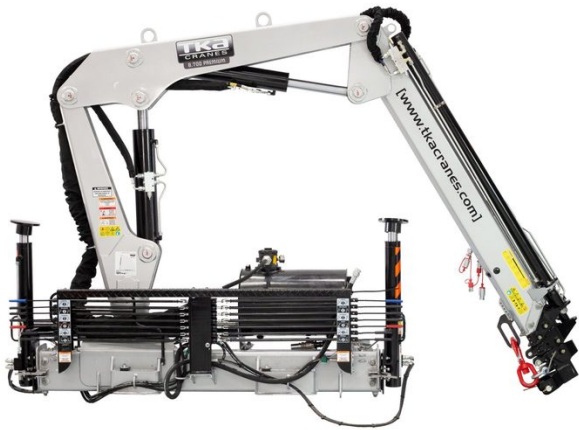

24,150 lb

MAXIMUM RATED CAPACITY

61.4 ft Maximum horizontal reach**72.8 ft** Maximum vertical reach**37,480 lb** Min. vehicle GVW for install

SPECIFICATION	US UNITS	METRIC
Maximum lifting capacity	24,150 lb	10,955 kg
Hydraulic extensions	9	-
Maximum vertical reach	72.8 ft	22.2 m
Maximum horizontal reach	61.4 ft	18.7 m
Hydraulic vertical reach	51.5 ft	15.7 m
Hydraulic horizontal reach	39.4 ft	12.0 m
Front outrigger spread	18.7 ft	5.7 m
Lifting angle	82°	-
Slewing angle	370°	-
Slewing torque	30,090 ft·lbf	4.16 tf·m
Working pressure	3,770 psi	260 bar
Hydraulic oil capacity	26.4 gal	100 L
Transport footprint	3.6 ft	1.1 m
Min. vehicle GVW for install	37,480 lb	17,000 kg
Crane weight (by configuration)	5,150–5,730 lb	2,335–2,600 kg

Need rated capacities at reach?


Capacity changes with reach. Request the certified load chart and a fitment review for your truck before purchase.

(832) 817-2904 • sales@outlastcrane.com • outlastcrane.com



TKA 30.700

Outlast Brazilian Boom

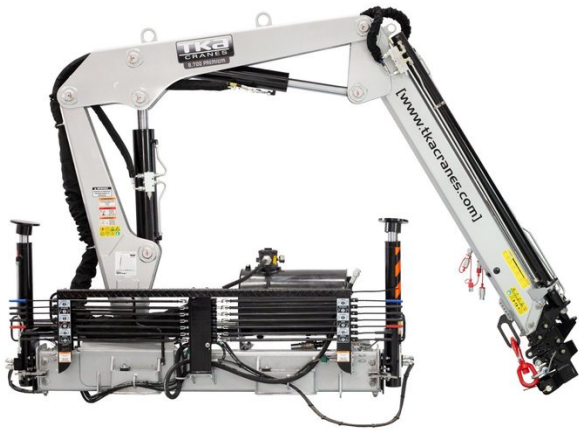

23,620 lb

MAXIMUM RATED CAPACITY

60.0 ft Maximum horizontal reach**71.5 ft** Maximum vertical reach**50,710 lb** Min. vehicle GVW for install

SPECIFICATION	US UNITS	METRIC
Maximum lifting capacity	23,620 lb	10,715 kg
Hydraulic extensions	8	-
Maximum vertical reach	71.5 ft	21.8 m
Maximum horizontal reach	60.0 ft	18.3 m
Hydraulic vertical reach	57.7 ft	17.6 m
Hydraulic horizontal reach	45.9 ft	14.0 m
Front outrigger spread	18.7 ft	5.7 m
Lifting angle	81°	-
Slewing angle	370°	-
Slewing torque	27,560 ft·lbf	3.81 tf·m
Working pressure	3,770 psi	260 bar
Hydraulic oil capacity	26.4 gal	100 L
Transport footprint	3.6 ft	1.1 m
Min. vehicle GVW for install	50,710 lb	23,000 kg
Crane weight (by configuration)	7,130–7,710 lb	3,235–3,495 kg

Need rated capacities at reach?


Capacity changes with reach. Request the certified load chart and a fitment review for your truck before purchase.

(832) 817-2904 • sales@outlastcrane.com • outlastcrane.com



TKA 35.700

Outlast Brazilian Boom

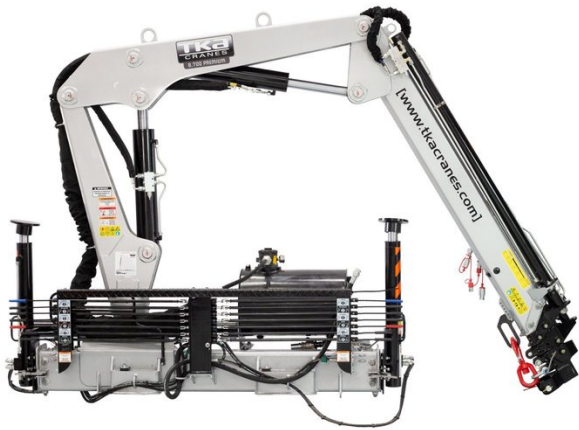

39,840 lb

MAXIMUM RATED CAPACITY

67.6 ft Maximum horizontal reach**78.1 ft** Maximum vertical reach**50,710 lb** Min. vehicle GVW for install

SPECIFICATION	US UNITS	METRIC
Maximum lifting capacity	39,840 lb	18,070 kg
Hydraulic extensions	6	-
Maximum vertical reach	78.1 ft	23.8 m
Maximum horizontal reach	67.6 ft	20.6 m
Hydraulic vertical reach	57.1 ft	17.4 m
Hydraulic horizontal reach	46.3 ft	14.1 m
Front outrigger spread	19.7 ft	6.0 m
Lifting angle	80°	-
Slewing angle	400°	-
Slewing torque	27,560 ft·lbf	3.81 tf·m
Working pressure	4,060 psi	280 bar
Hydraulic oil capacity	26.4 gal	100 L
Transport footprint	3.6 ft	1.1 m
Min. vehicle GVW for install	50,710 lb	23,000 kg
Crane weight (by configuration)	7,500–8,110 lb	3,400–3,680 kg

Need rated capacities at reach?


Capacity changes with reach. Request the certified load chart and a fitment review for your truck before purchase.

(832) 817-2904 • sales@outlastcrane.com • outlastcrane.com



TKA 40.900

Outlast Brazilian Boom

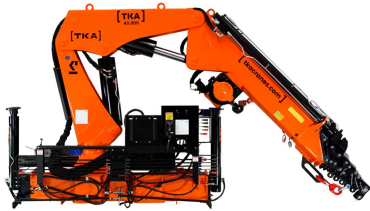

20,940 lb

MAXIMUM RATED CAPACITY

67.6 ft Maximum horizontal reach**78.1 ft** Maximum vertical reach**50,710 lb** Min. vehicle GVW for install

SPECIFICATION	US UNITS	METRIC / REFERENCE
Maximum lifting capacity	20,940 lb	9,500 kg
Published own weight	8,110 lb	3,680 kg
Boom configuration	Standard	-
Hydraulic extensions	5	—
Manual extensions	3	—
Maximum vertical reach	78.1 ft	23.80 m
Maximum horizontal reach	67.6 ft	20.60 m
Front stabilizer spread	19.6 ft	See load chart
Boom elevation angle	80°	—
Slewing angle	400°	—
Slewing torque	27,550 ft·lbf	37.36 kN·m
Maximum operating pressure	3,988 psi	275 bar
Hydraulic oil capacity	26.4 gal	100 L
Installation footprint	2.4 ft	0.70 m
Minimum vehicle GVW	50,710 lb	23,000 kg

Need rated capacities at reach?


Capacity changes with reach. Request the certified load chart and a fitment review for your truck before purchase.

(832) 817-2904 · sales@outlastcrane.com · outlastcrane.com



TKA 41.900

Outlast Brazilian Boom



20,940 lb

MAXIMUM RATED CAPACITY

67.6 ft Maximum horizontal reach**78.1 ft** Maximum vertical reach**50,710 lb** Min. vehicle GVW for install

SPECIFICATION	US UNITS	METRIC / REFERENCE
Maximum lifting capacity	20,940 lb	9,500 kg
Published own weight	8,110 lb	3,680 kg
Boom configuration	Standard	-
Hydraulic extensions	5	—
Manual extensions	3	—
Maximum vertical reach	78.1 ft	23.80 m
Maximum horizontal reach	67.6 ft	20.60 m
Front stabilizer spread	19.6 ft	See load chart
Boom elevation angle	80°	—
Slewing angle	400°	—
Slewing torque	27,550 ft·lbf	37.36 kN·m
Maximum operating pressure	3,988 psi	275 bar
Hydraulic oil capacity	26.4 gal	100 L
Installation footprint	2.4 ft	0.70 m
Minimum vehicle GVW	50,710 lb	23,000 kg

Need rated capacities at reach?


Capacity changes with reach. Request the certified load chart and a fitment review for your truck before purchase.

(832) 817-2904 • sales@outlastcrane.com • outlastcrane.com



TKA 45.700

Outlast Brazilian Boom

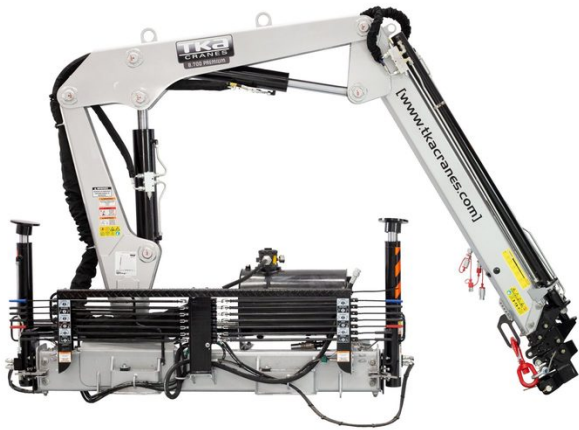

50,270 lb

MAXIMUM RATED CAPACITY

69.9 ft Maximum horizontal reach**82.3 ft** Maximum vertical reach**50,710 lb** Min. vehicle GVW for install

SPECIFICATION	US UNITS	METRIC
Maximum lifting capacity	50,270 lb	22,800 kg
Hydraulic extensions	6	-
Maximum vertical reach	82.3 ft	25.1 m
Maximum horizontal reach	69.9 ft	21.3 m
Hydraulic vertical reach	53.1 ft	16.2 m
Hydraulic horizontal reach	40.7 ft	12.4 m
Front outrigger spread	20.0 ft	6.1 m
Lifting angle	83°	-
Slewing angle	370°	-
Slewing torque	34,940 ft·lbf	4.83 tf·m
Working pressure	3,770 psi	260 bar
Hydraulic oil capacity	42.3 gal	160 L
Transport footprint	4.3 ft	1.3 m
Min. vehicle GVW for install	50,710 lb	23,000 kg
Crane weight (by configuration)	9,290–9,870 lb	4,215–4,475 kg

Need rated capacities at reach?


Capacity changes with reach. Request the certified load chart and a fitment review for your truck before purchase.

(832) 817-2904 • sales@outlastcrane.com • outlastcrane.com



TKA 48.700

Outlast Brazilian Boom

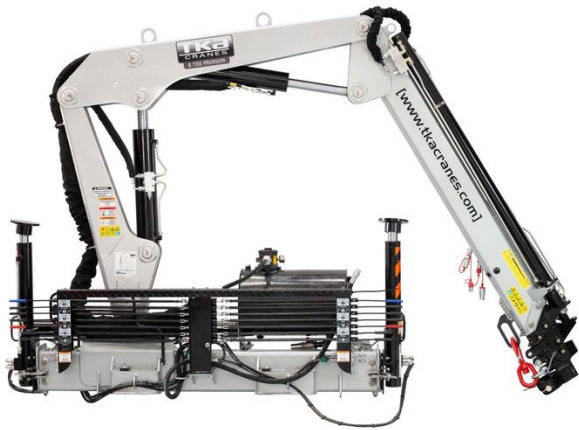

50,310 lb

MAXIMUM RATED CAPACITY

65.3 ft Maximum horizontal reach**77.1 ft** Maximum vertical reach**50,710 lb** Min. vehicle GVW for install

SPECIFICATION	US UNITS	METRIC
Maximum lifting capacity	50,310 lb	22,820 kg
Hydraulic extensions	6	-
Maximum vertical reach	77.1 ft	23.5 m
Maximum horizontal reach	65.3 ft	19.9 m
Hydraulic vertical reach	63.6 ft	19.4 m
Hydraulic horizontal reach	51.2 ft	15.6 m
Front outrigger spread	21.3 ft	6.5 m
Lifting angle	81°	-
Slewing angle	370°	-
Slewing torque	34,940 ft·lbf	4.83 tf·m
Working pressure	3,770 psi	260 bar
Hydraulic oil capacity	42.3 gal	160 L
Transport footprint	4.3 ft	1.3 m
Min. vehicle GVW for install	50,710 lb	23,000 kg
Crane weight (by configuration)	9,680–10,660 lb	4,390–4,835 kg

Need rated capacities at reach?

Capacity changes with reach. Request the certified load chart and a fitment review for your truck before purchase.

(832) 817-2904 • sales@outlastcrane.com • outlastcrane.com



TKA 51.900

Outlast Brazilian Boom



25,570 lb

MAXIMUM RATED CAPACITY

72.8 ft Maximum horizontal reach**83.7 ft** Maximum vertical reach**50,710 lb** Min. vehicle GVW for install

SPECIFICATION	US UNITS	METRIC / REFERENCE
Maximum lifting capacity	25,570 lb	11,600 kg
Published own weight	10,650 lb	4,830 kg
Boom configuration	Standard	-
Hydraulic extensions	6	—
Manual extensions	3	—
Maximum vertical reach	83.7 ft	25.50 m
Maximum horizontal reach	72.8 ft	22.20 m
Front stabilizer spread	26.2 ft	See load chart
Boom elevation angle	80°	—
Slewing angle	360°	—
Slewing torque	37,820 ft·lbf	51.28 kN·m
Maximum operating pressure	3,988 psi	275 bar
Hydraulic oil capacity	39.6 gal	150 L
Installation footprint	4.3 ft	1.30 m
Minimum vehicle GVW	50,710 lb	23,000 kg

Need rated capacities at reach?

Capacity changes with reach. Request the certified load chart and a fitment review for your truck before purchase.

(832) 817-2904 • sales@outlastcrane.com • outlastcrane.com



TKA 52.700 C

Outlast Brazilian Boom



57,060 lb

MAXIMUM RATED CAPACITY

73.8 ft Maximum horizontal reach**86.0 ft** Maximum vertical reach**50,710 lb** Min. vehicle GVW for install

SPECIFICATION	US UNITS	METRIC
Maximum lifting capacity	57,060 lb	25,880 kg
Hydraulic extensions	8	-
Maximum vertical reach	86.0 ft	26.2 m
Maximum horizontal reach	73.8 ft	22.5 m
Hydraulic vertical reach	64.0 ft	19.5 m
Hydraulic horizontal reach	52.7 ft	16.06 m
Front outrigger spread	20.7 ft	6.3 m
Lifting angle	81°	-
Slewing angle	370°	-
Slewing torque	34,940 ft·lbf	4.83 tf·m
Working pressure	4,060 psi	280 bar
Hydraulic oil capacity	42.3 gal	160 L
Transport footprint	4.9 ft	1.5 m
Min. vehicle GVW for install	50,710 lb	23,000 kg
Crane weight (by configuration)	11,870–12,480 lb	5,385–5,660 kg

Need rated capacities at reach?


Capacity changes with reach. Request the certified load chart and a fitment review for your truck before purchase.

(832) 817-2904 • sales@outlastcrane.com • outlastcrane.com



TKA 55.900

Outlast Brazilian Boom



30,200 lb

MAXIMUM RATED CAPACITY

73.5 ft Maximum horizontal reach**84.6 ft** Maximum vertical reach**50,710 lb** Min. vehicle GVW for install

SPECIFICATION	US UNITS	METRIC / REFERENCE
Maximum lifting capacity	30,200 lb	13,700 kg
Published own weight	12,410 lb	5,630 kg
Boom configuration	Standard	-
Hydraulic extensions	6	—
Manual extensions	3	—
Maximum vertical reach	84.6 ft	25.80 m
Maximum horizontal reach	73.5 ft	22.40 m
Front stabilizer spread	27.9 ft	See load chart
Boom elevation angle	80°	—
Slewing angle	370°	—
Slewing torque	48,750 ft·lbf	6.74 tf·m
Maximum operating pressure	3,988 psi	275 bar
Hydraulic oil capacity	46.2 gal	175 L
Installation footprint	5.1 ft	1.55 m
Minimum vehicle GVW	50,710 lb	23,000 kg

Need rated capacities at reach?

Capacity changes with reach. Request the certified load chart and a fitment review for your truck before purchase.

(832) 817-2904 · sales@outlastcrane.com · outlastcrane.com



TKA 55.900 Fly Jib

Outlast Brazilian Boom



28,220 lb

MAXIMUM RATED CAPACITY

88.9 ft Maximum horizontal reach**100.1 ft** Maximum vertical reach**50,710 lb** Min. vehicle GVW for install

SPECIFICATION	US UNITS	METRIC / REFERENCE
Maximum lifting capacity	28,220 lb	12,800 kg
Published own weight	13,620 lb	6,180 kg
Boom configuration	Fly Jib	-
Hydraulic extensions	6 + 5 Fly Jib	—
Manual extensions	0	—
Maximum vertical reach	100.1 ft	30.50 m
Maximum horizontal reach	88.9 ft	27.10 m
Front stabilizer spread	27.9 ft	See load chart
Boom elevation angle	80°	—
Slewing angle	370°	—
Slewing torque	47,230 ft·lbf	6.53 tf·m
Maximum operating pressure	3,988 psi	275 bar
Hydraulic oil capacity	46.2 gal	175 L
Installation footprint	5.6 ft	1.70 m
Minimum vehicle GVW	50,710 lb	23,000 kg

Need rated capacities at reach?


Capacity changes with reach. Request the certified load chart and a fitment review for your truck before purchase.

(832) 817-2904 · sales@outlastcrane.com · outlastcrane.com



TKA 70.700

Outlast Brazilian Boom

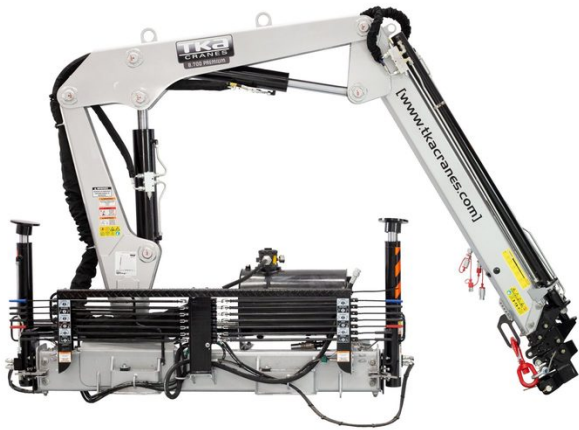

69,230 lb

MAXIMUM RATED CAPACITY

76.8 ft Maximum horizontal reach**87.9 ft** Maximum vertical reach**50,710 lb** Min. vehicle GVW for install

SPECIFICATION	US UNITS	METRIC
Maximum lifting capacity	69,230 lb	31,400 kg
Hydraulic extensions	4	-
Maximum vertical reach	87.9 ft	26.8 m
Maximum horizontal reach	76.8 ft	23.4 m
Hydraulic vertical reach	65.3 ft	19.9 m
Hydraulic horizontal reach	53.8 ft	16.4 m
Front outrigger spread	26.2 ft	8.0 m
Lifting angle	81°	-
Slewing angle	370°	-
Slewing torque	47,230 ft·lbf	6.53 tf·m
Working pressure	4,060 psi	280 bar
Hydraulic oil capacity	42.3 gal	160 L
Transport footprint	4.9 ft	1.5 m
Min. vehicle GVW for install	50,710 lb	23,000 kg
Crane weight (by configuration)	14,770–15,010 lb	6,700–6,810 kg

Need rated capacities at reach?


Capacity changes with reach. Request the certified load chart and a fitment review for your truck before purchase.

(832) 817-2904 • sales@outlastcrane.com • outlastcrane.com



TKA 70.700 Fly Jib

Outlast Brazilian Boom

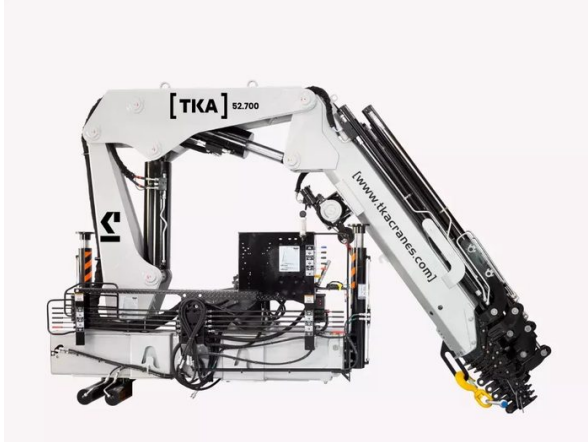

71,100 lb

MAXIMUM RATED CAPACITY

53.4 ft / 89.1 ft Maximum horizontal reach**65.6 ft / 101.7 ft** Maximum vertical reach**50,710 lb** Min. vehicle GVW for install

SPECIFICATION	US UNITS	METRIC
Maximum lifting capacity	71,100 lb	32,250 kg
Hydraulic extensions	5	-
Maximum vertical reach	65.6 ft / 101.7 ft	20.00 m / 31.00 m
Maximum horizontal reach	53.4 ft / 89.1 ft	16.27 m / 27.15 m
Hydraulic vertical reach	65.6 ft / 95.7 ft	20.00 m / 29.17 m
Hydraulic horizontal reach	53.4 ft / 85.0 ft	16.27 m / 25.90 m
Front outrigger spread	26.2 ft	8.0 m
Lifting angle	81°	-
Slewing angle	370°	-
Slewing torque	47,230 ft·lbf	6.53 tf·m
Working pressure	4,060 psi	280 bar
Hydraulic oil capacity	42.3 gal	160 L
Transport footprint	4.9 ft	1.5 m
Min. vehicle GVW for install	50,710 lb	23,000 kg
Crane weight (by configuration)	14,770–16,530 lb	6,700–7,500 kg

Need rated capacities at reach?


Capacity changes with reach. Request the certified load chart and a fitment review for your truck before purchase.

(832) 817-2904 • sales@outlastcrane.com • outlastcrane.com



TKA 72.900

Outlast Brazilian Boom

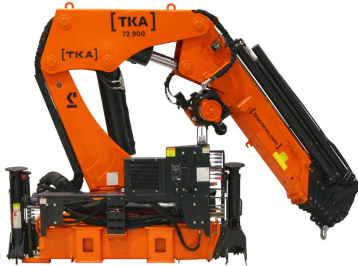

35,270 lb

MAXIMUM RATED CAPACITY

79.1 ft Maximum horizontal reach**90.6 ft** Maximum vertical reach**50,710 lb** Min. vehicle GVW for install

SPECIFICATION	US UNITS	METRIC / REFERENCE
Maximum lifting capacity	35,270 lb	16,000 kg
Published own weight	13,120 lb	5,950 kg
Boom configuration	Standard	-
Hydraulic extensions	7	—
Manual extensions	3	—
Maximum vertical reach	90.6 ft	27.60 m
Maximum horizontal reach	79.1 ft	24.10 m
Front stabilizer spread	27.6 ft	See load chart
Boom elevation angle	80°	—
Slewing angle	370°	—
Slewing torque	41,230 ft·lbf	55.90 kN·m
Maximum operating pressure	4,640 psi	320 bar
Hydraulic oil capacity	46.2 gal	175 L
Installation footprint	4.7 ft	1.40 m
Minimum vehicle GVW	50,710 lb	23,000 kg

Need rated capacities at reach?


Capacity changes with reach. Request the certified load chart and a fitment review for your truck before purchase.

(832) 817-2904 · sales@outlastcrane.com · outlastcrane.com



TKA 72.900 Fly Jib

Outlast Brazilian Boom

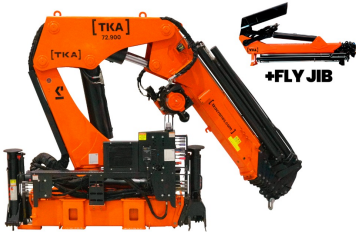

33,070 lb

MAXIMUM RATED CAPACITY

94.8 ft Maximum horizontal reach**107.3 ft** Maximum vertical reach**50,710 lb** Min. vehicle GVW for install

SPECIFICATION	US UNITS	METRIC / REFERENCE
Maximum lifting capacity	33,070 lb	15,000 kg
Published own weight	14,700 lb	6,670 kg
Boom configuration	Fly Jib	-
Hydraulic extensions	7 + 4 Fly Jib	—
Manual extensions	1 Fly Jib	—
Maximum vertical reach	107.3 ft	32.70 m
Maximum horizontal reach	94.8 ft	28.90 m
Front stabilizer spread	27.6 ft	See load chart
Boom elevation angle	80°	—
Slewing angle	370°	—
Slewing torque	41,230 ft·lbf	55.90 kN·m
Maximum operating pressure	4,640 psi	320 bar
Hydraulic oil capacity	46.2 gal	175 L
Installation footprint	4.7 ft	1.40 m
Minimum vehicle GVW	50,710 lb	23,000 kg

Need rated capacities at reach?

Capacity changes with reach. Request the certified load chart and a fitment review for your truck before purchase.

(832) 817-2904 · sales@outlastcrane.com · outlastcrane.com



TKA 80.700

Outlast Brazilian Boom



87,480 lb

MAXIMUM RATED CAPACITY

83.7 ft Maximum horizontal reach**95.8 ft** Maximum vertical reach**50,710 lb** Min. vehicle GVW for install

SPECIFICATION	US UNITS	METRIC
Maximum lifting capacity	87,480 lb	39,680 kg
Hydraulic extensions	7	-
Maximum vertical reach	95.8 ft	29.2 m
Maximum horizontal reach	83.7 ft	25.5 m
Hydraulic vertical reach	73.2 ft	22.3 m
Hydraulic horizontal reach	60.7 ft	18.5 m
Front outrigger spread	27.6 ft	8.4 m
Lifting angle	80°	-
Slewing angle	360°	-
Slewing torque	59,240 ft·lbf	8.19 tf·m
Working pressure	4,060 psi	280 bar
Hydraulic oil capacity	66.0 gal	250 L
Transport footprint	5.6 ft	1.7 m
Min. vehicle GVW for install	50,710 lb	23,000 kg
Crane weight (by configuration)	14,770–16,310 lb	6,700–7,400 kg

Need rated capacities at reach?


Capacity changes with reach. Request the certified load chart and a fitment review for your truck before purchase.

(832) 817-2904 • sales@outlastcrane.com • outlastcrane.com



TKA 80.700 Fly Jib

Outlast Brazilian Boom

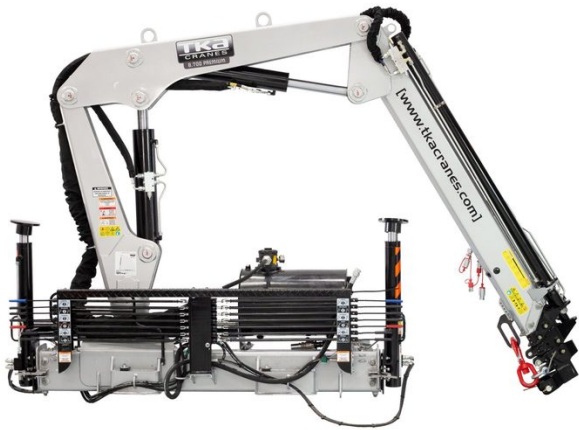

85,940 lb

MAXIMUM RATED CAPACITY

60.8 ft / 98.3 ft Maximum horizontal reach**73.8 ft / 109.9 ft** Maximum vertical reach**50,710 lb** Min. vehicle GVW for install

SPECIFICATION	US UNITS	METRIC
Maximum lifting capacity	85,940 lb	38,980 kg
Hydraulic extensions	5	-
Maximum vertical reach	73.8 ft / 109.9 ft	22.50 m / 33.51 m
Maximum horizontal reach	60.8 ft / 98.3 ft	18.53 m / 29.95 m
Hydraulic vertical reach	73.8 ft / 104.1 ft	22.50 m / 31.73 m
Hydraulic horizontal reach	60.8 ft / 92.1 ft	18.53 m / 28.06 m
Front outrigger spread	27.6 ft	8.4 m
Lifting angle	80°	-
Slewing angle	360°	-
Slewing torque	59,240 ft·lbf	8.19 tf·m
Working pressure	4,060 psi	280 bar
Hydraulic oil capacity	66.0 gal	250 L
Transport footprint	5.6 ft	1.7 m
Min. vehicle GVW for install	50,710 lb	23,000 kg
Crane weight (by configuration)	15,770–17,910 lb	7,155–8,125 kg

Need rated capacities at reach?


Capacity changes with reach. Request the certified load chart and a fitment review for your truck before purchase.

(832) 817-2904 • sales@outlastcrane.com • outlastcrane.com



TKA 90.900

Outlast Brazilian Boom



44,750 lb

MAXIMUM RATED CAPACITY

85.6 ft Maximum horizontal reach**101.7 ft** Maximum vertical reach**59,520 lb** Min. vehicle GVW for install

SPECIFICATION	US UNITS	METRIC / REFERENCE
Maximum lifting capacity	44,750 lb	20,300 kg
Published own weight	17,350 lb	7,870 kg
Boom configuration	Standard	-
Hydraulic extensions	8	—
Manual extensions	3	—
Maximum vertical reach	101.7 ft	31.00 m
Maximum horizontal reach	85.6 ft	26.10 m
Front stabilizer spread	27.6 ft	See load chart
Boom elevation angle	80°	—
Slewing angle	Continuous	—
Slewing torque	101,270 ft·lbf	137.29 kN·m
Maximum operating pressure	4,351 psi	300 bar
Hydraulic oil capacity	66.0 gal	250 L
Installation footprint	3.9 ft	1.20 m
Minimum vehicle GVW	59,520 lb	27,000 kg

Need rated capacities at reach?


Capacity changes with reach. Request the certified load chart and a fitment review for your truck before purchase.

(832) 817-2904 · sales@outlastcrane.com · outlastcrane.com



TKA 90.900 Fly Jib

Outlast Brazilian Boom



42,770 lb

MAXIMUM RATED CAPACITY

107.6 ft Maximum horizontal reach**119.8 ft** Maximum vertical reach**59,520 lb** Min. vehicle GVW for install

SPECIFICATION	US UNITS	METRIC / REFERENCE
Maximum lifting capacity	42,770 lb	19,400 kg
Published own weight	19,690 lb	8,930 kg
Boom configuration	Fly Jib	-
Hydraulic extensions	8 + 5 Fly Jib	—
Manual extensions	1 Fly Jib	—
Maximum vertical reach	119.8 ft	36.50 m
Maximum horizontal reach	107.6 ft	32.80 m
Front stabilizer spread	27.6 ft	See load chart
Boom elevation angle	80°	—
Slewing angle	Continuous	—
Slewing torque	101,270 ft·lbf	137.29 kN·m
Maximum operating pressure	4,351 psi	300 bar
Hydraulic oil capacity	66.0 gal	250 L
Installation footprint	5.9 ft	1.80 m
Minimum vehicle GVW	59,520 lb	27,000 kg

Need rated capacities at reach?


Capacity changes with reach. Request the certified load chart and a fitment review for your truck before purchase.

(832) 817-2904 · sales@outlastcrane.com · outlastcrane.com



TKA 6.700

Outlast Knuckle Boom

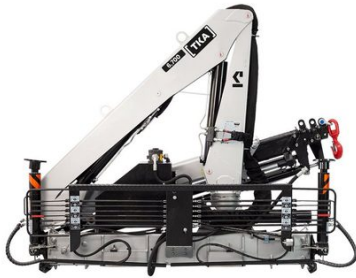

5,890 lb

MAXIMUM RATED CAPACITY

35.8 ft Maximum horizontal reach**45.3 ft** Maximum vertical reach**13,230 lb** Min. vehicle GVW for install

SPECIFICATION	US UNITS	METRIC
Maximum lifting capacity	5,890 lb	2,670 kg
Hydraulic extensions	4	-
Maximum vertical reach	45.3 ft	13.8 m
Maximum horizontal reach	35.8 ft	10.9 m
Hydraulic vertical reach	39.4 ft	12.0 m
Hydraulic horizontal reach	29.9 ft	9.1 m
Front outrigger spread	11.3 ft / 14.6 ft	3.45 m / 4.45 m
Lifting angle	80°	-
Slewing angle	360°	-
Slewing torque	6,940 ft·lbf	0.96 tf·m
Working pressure	4,060 psi	280 bar
Hydraulic oil capacity	10.6 gal	40 L
Transport footprint	3.0 ft	0.9 m
Min. vehicle GVW for install	13,230 lb	6,000 kg
Crane weight (by configuration)	2,380–2,430 lb	1,080–1,100 kg

Need rated capacities at reach?


Capacity changes with reach. Request the certified load chart and a fitment review for your truck before purchase.

(832) 817-2904 · sales@outlastcrane.com · outlastcrane.com



TKA 10.900

Outlast Knuckle Boom



8,820 lb

MAXIMUM RATED CAPACITY

33.0 ft Maximum horizontal reach**44.6 ft** Maximum vertical reach**15,430 lb** Min. vehicle GVW for install

SPECIFICATION	US UNITS	METRIC / REFERENCE
Maximum lifting capacity	8,820 lb	4,000 kg
Published own weight	2,910 lb	1,320 kg
Boom configuration	Standard	-
Hydraulic extensions	4	—
Manual extensions	0	—
Maximum vertical reach	44.6 ft	13.60 m
Maximum horizontal reach	33.0 ft	10.07 m
Front stabilizer spread	14.4 ft	See load chart
Boom elevation angle	82°	—
Slewing angle	400°	—
Slewing torque	6,940 ft·lbf	9.41 kN·m
Maximum operating pressure	3,988 psi	275 bar
Hydraulic oil capacity	18.5 gal	70 L
Installation footprint	2.9 ft	0.90 m
Minimum vehicle GVW	15,430 lb	7,000 kg

Need rated capacities at reach?

Capacity changes with reach. Request the certified load chart and a fitment review for your truck before purchase.

(832) 817-2904 · sales@outlastcrane.com · outlastcrane.com



TKA 11.700 C

Outlast Knuckle Boom



10,360 lb

MAXIMUM RATED CAPACITY

46.6 ft Maximum horizontal reach**56.8 ft** Maximum vertical reach**24,250 lb** Min. vehicle GVW for install

SPECIFICATION	US UNITS	METRIC
Maximum lifting capacity	10,360 lb	4,700 kg
Hydraulic extensions	7	-
Maximum vertical reach	56.8 ft	17.3 m
Maximum horizontal reach	46.6 ft	14.2 m
Hydraulic vertical reach	43.0 ft	13.1 m
Hydraulic horizontal reach	32.5 ft	9.9 m
Front outrigger spread	15.1 ft	4.6 m
Lifting angle	82°	-
Slewing angle	400°	-
Slewing torque	11,360 ft·lbf	1.57 tf·m
Working pressure	4,060 psi	280 bar
Hydraulic oil capacity	18.5 gal	70 L
Transport footprint	3.3 ft	1.0 m
Min. vehicle GVW for install	24,250 lb	11,000 kg
Crane weight (by configuration)	3,020–3,350 lb	1,370–1,520 kg

Need rated capacities at reach?


Capacity changes with reach. Request the certified load chart and a fitment review for your truck before purchase.

(832) 817-2904 · sales@outlastcrane.com · outlastcrane.com



TKA 12.900

Outlast Knuckle Boom



13,120 lb

MAXIMUM RATED CAPACITY

46.6 ft Maximum horizontal reach**56.8 ft** Maximum vertical reach**24,250 lb** Min. vehicle GVW for install

SPECIFICATION	US UNITS	METRIC / REFERENCE
Maximum lifting capacity	13,120 lb	5,950 kg
Published own weight	3,440 lb	1,560 kg
Boom configuration	Standard	-
Hydraulic extensions	4	—
Manual extensions	1	—
Maximum vertical reach	56.8 ft	17.30 m
Maximum horizontal reach	46.6 ft	14.20 m
Front stabilizer spread	15.1 ft	See load chart
Boom elevation angle	82°	—
Slewing angle	400°	—
Slewing torque	11,320 ft·lbf	15.35 kN·m
Maximum operating pressure	3,988 psi	275 bar
Hydraulic oil capacity	18.5 gal	70 L
Installation footprint	2.2 ft	0.70 m
Minimum vehicle GVW	24,250 lb	11,000 kg

Need rated capacities at reach?

Capacity changes with reach. Request the certified load chart and a fitment review for your truck before purchase.

(832) 817-2904 · sales@outlastcrane.com · outlastcrane.com



TKA 14.700 C

Outlast Knuckle Boom



12,190 lb

MAXIMUM RATED CAPACITY

53.5 ft Maximum horizontal reach**65.0 ft** Maximum vertical reach**24,250 lb** Min. vehicle GVW for install

SPECIFICATION	US UNITS	METRIC
Maximum lifting capacity	12,190 lb	5,530 kg
Hydraulic extensions	5	-
Maximum vertical reach	65.0 ft	19.8 m
Maximum horizontal reach	53.5 ft	16.3 m
Hydraulic vertical reach	51.2 ft	15.6 m
Hydraulic horizontal reach	40.0 ft	12.2 m
Front outrigger spread	17.7 ft	5.4 m
Lifting angle	81°	-
Slewing angle	360°	-
Slewing torque	19,020 ft·lbf	2.63 tf·m
Working pressure	3,770 psi	260 bar
Hydraulic oil capacity	23.8 gal	90 L
Transport footprint	3.9 ft	1.2 m
Min. vehicle GVW for install	24,250 lb	11,000 kg
Crane weight (by configuration)	4,330–4,760 lb	1,965–2,160 kg

Need rated capacities at reach?

Capacity changes with reach. Request the certified load chart and a fitment review for your truck before purchase.

(832) 817-2904 • sales@outlastcrane.com • outlastcrane.com



TKA 15.900

Outlast Knuckle Boom



12,570 lb

MAXIMUM RATED CAPACITY

53.5 ft Maximum horizontal reach**64.3 ft** Maximum vertical reach**24,250 lb** Min. vehicle GVW for install

SPECIFICATION	US UNITS	METRIC / REFERENCE
Maximum lifting capacity	12,570 lb	5,700 kg
Published own weight	4,610 lb	2,090 kg
Boom configuration	Standard	-
Hydraulic extensions	4	—
Manual extensions	2	—
Maximum vertical reach	64.3 ft	19.60 m
Maximum horizontal reach	53.5 ft	16.30 m
Front stabilizer spread	17.7 ft	See load chart
Boom elevation angle	81°	—
Slewing angle	360°	—
Slewing torque	19,040 ft·lbf	25.82 kN·m
Maximum operating pressure	3,988 psi	275 bar
Hydraulic oil capacity	23.8 gal	90 L
Installation footprint	3.9 ft	1.20 m
Minimum vehicle GVW	24,250 lb	11,000 kg

Need rated capacities at reach?


Capacity changes with reach. Request the certified load chart and a fitment review for your truck before purchase.

(832) 817-2904 · sales@outlastcrane.com · outlastcrane.com



TKA 17.700 C

Outlast Knuckle Boom

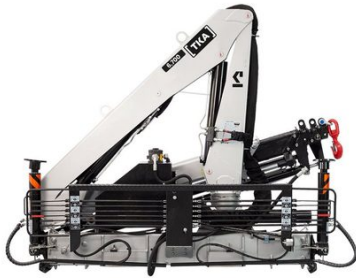

15,980 lb

MAXIMUM RATED CAPACITY

51.2 ft Maximum horizontal reach**62.0 ft** Maximum vertical reach**28,660 lb** Min. vehicle GVW for install

SPECIFICATION	US UNITS	METRIC
Maximum lifting capacity	15,980 lb	7,250 kg
Hydraulic extensions	5	-
Maximum vertical reach	62.0 ft	18.9 m
Maximum horizontal reach	51.2 ft	15.6 m
Hydraulic vertical reach	48.9 ft	14.9 m
Hydraulic horizontal reach	37.7 ft	11.5 m
Front outrigger spread	17.7 ft	5.4 m
Lifting angle	81°	-
Slewing angle	400°	-
Slewing torque	20,900 ft·lbf	2.89 tf·m
Working pressure	3,770 psi	260 bar
Hydraulic oil capacity	26.4 gal	100 L
Transport footprint	4.3 ft	1.3 m
Min. vehicle GVW for install	28,660 lb	13,000 kg
Crane weight (by configuration)	5,350–5,800 lb	2,425–2,630 kg

Need rated capacities at reach?

Capacity changes with reach. Request the certified load chart and a fitment review for your truck before purchase.

(832) 817-2904 · sales@outlastcrane.com · outlastcrane.com



TKA 17.900

Outlast Knuckle Boom



15,430 lb

MAXIMUM RATED CAPACITY

53.5 ft Maximum horizontal reach**64.3 ft** Maximum vertical reach**28,660 lb** Min. vehicle GVW for install

SPECIFICATION	US UNITS	METRIC / REFERENCE
Maximum lifting capacity	15,430 lb	7,000 kg
Published own weight	5,340 lb	2,420 kg
Boom configuration	Standard	-
Hydraulic extensions	4	—
Manual extensions	2	—
Maximum vertical reach	64.3 ft	19.60 m
Maximum horizontal reach	53.5 ft	16.30 m
Front stabilizer spread	19.0 ft	See load chart
Boom elevation angle	81°	—
Slewing angle	400°	—
Slewing torque	20,890 ft·lbf	28.32 kN·m
Maximum operating pressure	3,988 psi	275 bar
Hydraulic oil capacity	26.4 gal	100 L
Installation footprint	4.3 ft	1.30 m
Minimum vehicle GVW	28,660 lb	13,000 kg

Need rated capacities at reach?


Capacity changes with reach. Request the certified load chart and a fitment review for your truck before purchase.

(832) 817-2904 · sales@outlastcrane.com · outlastcrane.com



TKA 18.700 C

Outlast Knuckle Boom

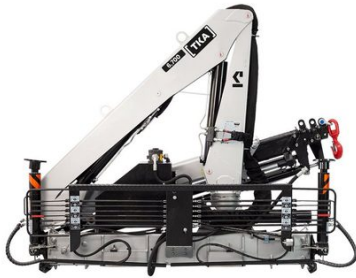

15,980 lb

MAXIMUM RATED CAPACITY

61.4 ft Maximum horizontal reach**72.8 ft** Maximum vertical reach**33,070 lb** Min. vehicle GVW for install

SPECIFICATION	US UNITS	METRIC
Maximum lifting capacity	15,980 lb	7,250 kg
Hydraulic extensions	7	-
Maximum vertical reach	72.8 ft	22.2 m
Maximum horizontal reach	61.4 ft	18.7 m
Hydraulic vertical reach	58.4 ft	17.8 m
Hydraulic horizontal reach	46.9 ft	14.3 m
Front outrigger spread	16.4 ft	5.0 m
Lifting angle	80°	-
Slewing angle	400°	-
Slewing torque	20,900 ft·lbf	2.89 tf·m
Working pressure	4,060 psi	280 bar
Hydraulic oil capacity	26.4 gal	100 L
Transport footprint	4.3 ft	1.3 m
Min. vehicle GVW for install	33,070 lb	15,000 kg
Crane weight (by configuration)	5,450–6,000 lb	2,470–2,720 kg

Need rated capacities at reach?

Capacity changes with reach. Request the certified load chart and a fitment review for your truck before purchase.

(832) 817-2904 • sales@outlastcrane.com • outlastcrane.com



TKA 18.900

Outlast Knuckle Boom



15,980 lb

MAXIMUM RATED CAPACITY

61.4 ft Maximum horizontal reach**72.8 ft** Maximum vertical reach**33,070 lb** Min. vehicle GVW for install

SPECIFICATION	US UNITS	METRIC / REFERENCE
Maximum lifting capacity	15,980 lb	7,250 kg
Published own weight	5,670 lb	2,570 kg
Boom configuration	Standard	-
Hydraulic extensions	5	—
Manual extensions	2	—
Maximum vertical reach	72.8 ft	22.20 m
Maximum horizontal reach	61.4 ft	18.70 m
Front stabilizer spread	19.0 ft	See load chart
Boom elevation angle	80°	—
Slewing angle	400°	—
Slewing torque	20,900 ft·lbf	28.34 kN·m
Maximum operating pressure	3,988 psi	275 bar
Hydraulic oil capacity	26.4 gal	100 L
Installation footprint	3.9 ft	1.20 m
Minimum vehicle GVW	33,070 lb	15,000 kg

Need rated capacities at reach?


Capacity changes with reach. Request the certified load chart and a fitment review for your truck before purchase.

(832) 817-2904 · sales@outlastcrane.com · outlastcrane.com



TKA 23.700 C

Outlast Knuckle Boom

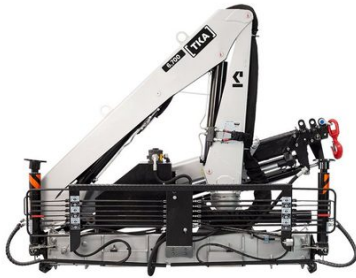

20,580 lb

MAXIMUM RATED CAPACITY

59.7 ft Maximum horizontal reach**70.4 ft** Maximum vertical reach**35,270 lb** Min. vehicle GVW for install

SPECIFICATION	US UNITS	METRIC
Maximum lifting capacity	20,580 lb	9,335 kg
Hydraulic extensions	6	-
Maximum vertical reach	70.4 ft	21.45 m
Maximum horizontal reach	59.7 ft	18.2 m
Hydraulic vertical reach	56.8 ft	17.3 m
Hydraulic horizontal reach	45.9 ft	14.0 m
Front outrigger spread	19.4 ft	5.9 m
Lifting angle	81°	-
Slewing angle	400°	-
Slewing torque	23,510 ft·lbf	3.25 tf·m
Working pressure	4,060 psi	280 bar
Hydraulic oil capacity	26.4 gal	100 L
Transport footprint	4.6 ft	1.4 m
Min. vehicle GVW for install	35,270 lb	16,000 kg
Crane weight (by configuration)	5,860–6,640 lb	2,660–3,010 kg

Need rated capacities at reach?

Capacity changes with reach. Request the certified load chart and a fitment review for your truck before purchase.

(832) 817-2904 · sales@outlastcrane.com · outlastcrane.com



TKA 30.700 C

Outlast Knuckle Boom



22,600 lb

MAXIMUM RATED CAPACITY

67.9 ft Maximum horizontal reach**78.1 ft** Maximum vertical reach**48,500 lb** Min. vehicle GVW for install

SPECIFICATION	US UNITS	METRIC
Maximum lifting capacity	22,600 lb	10,250 kg
Hydraulic extensions	6	-
Maximum vertical reach	78.1 ft	23.8 m
Maximum horizontal reach	67.9 ft	20.7 m
Hydraulic vertical reach	57.1 ft	17.4 m
Hydraulic horizontal reach	46.3 ft	14.1 m
Front outrigger spread	19.7 ft	6.0 m
Lifting angle	75°	-
Slewing angle	400°	-
Slewing torque	27,560 ft·lbf	3.81 tf·m
Working pressure	4,060 psi	280 bar
Hydraulic oil capacity	31.7 gal	120 L
Transport footprint	4.9 ft	1.5 m
Min. vehicle GVW for install	48,500 lb	22,000 kg
Crane weight (by configuration)	7,660–8,250 lb	3,475–3,740 kg

Need rated capacities at reach?

Capacity changes with reach. Request the certified load chart and a fitment review for your truck before purchase.

(832) 817-2904 · sales@outlastcrane.com · outlastcrane.com



TKA 30.900

Outlast Knuckle Boom



22,600 lb

MAXIMUM RATED CAPACITY

67.9 ft Maximum horizontal reach**78.1 ft** Maximum vertical reach**48,500 lb** Min. vehicle GVW for install

SPECIFICATION	US UNITS	METRIC / REFERENCE
Maximum lifting capacity	22,600 lb	10,250 kg
Published own weight	8,250 lb	3,740 kg
Boom configuration	Standard	-
Hydraulic extensions	5	—
Manual extensions	3	—
Maximum vertical reach	78.1 ft	23.80 m
Maximum horizontal reach	67.9 ft	20.70 m
Front stabilizer spread	19.7 ft	See load chart
Boom elevation angle	75°	—
Slewing angle	400°	—
Slewing torque	27,580 ft·lbf	37.39 kN·m
Maximum operating pressure	3,988 psi	275 bar
Hydraulic oil capacity	31.7 gal	120 L
Installation footprint	4.9 ft	1.50 m
Minimum vehicle GVW	48,500 lb	22,000 kg

Need rated capacities at reach?

Capacity changes with reach. Request the certified load chart and a fitment review for your truck before purchase.

(832) 817-2904 · sales@outlastcrane.com · outlastcrane.com



TKA 38.700 C

Outlast Knuckle Boom



40,450 lb

MAXIMUM RATED CAPACITY

68.6 ft Maximum horizontal reach**80.4 ft** Maximum vertical reach**50,710 lb** Min. vehicle GVW for install

SPECIFICATION	US UNITS	METRIC
Maximum lifting capacity	40,450 lb	18,350 kg
Hydraulic extensions	7	-
Maximum vertical reach	80.4 ft	24.5 m
Maximum horizontal reach	68.6 ft	20.9 m
Hydraulic vertical reach	65.9 ft	20.1 m
Hydraulic horizontal reach	53.1 ft	16.2 m
Front outrigger spread	19.7 ft	6.0 m
Lifting angle	80°	-
Slewing angle	400°	-
Slewing torque	27,560 ft·lbf	3.81 tf·m
Working pressure	4,060 psi	280 bar
Hydraulic oil capacity	37.0 gal	140 L
Transport footprint	4.9 ft	1.5 m
Min. vehicle GVW for install	50,710 lb	23,000 kg
Crane weight (by configuration)	8,890–9,760 lb	4,033–4,425 kg

Need rated capacities at reach?

Capacity changes with reach. Request the certified load chart and a fitment review for your truck before purchase.

(832) 817-2904 • sales@outlastcrane.com • outlastcrane.com



TKA 38.900

Outlast Knuckle Boom



40,450 lb

MAXIMUM RATED CAPACITY

68.6 ft Maximum horizontal reach**80.4 ft** Maximum vertical reach**50,710 lb** Min. vehicle GVW for install

SPECIFICATION	US UNITS	METRIC / REFERENCE
Maximum lifting capacity	40,450 lb	18,350 kg
Published own weight	9,760 lb	4,425 kg
Boom configuration	Standard	-
Hydraulic extensions	6	—
Manual extensions	2	—
Maximum vertical reach	80.4 ft	24.50 m
Maximum horizontal reach	68.6 ft	20.90 m
Front stabilizer spread	19.7 ft	See load chart
Boom elevation angle	80°	—
Slewing angle	400°	—
Slewing torque	27,580 ft·lbf	37.39 kN·m
Maximum operating pressure	3,988 psi	275 bar
Hydraulic oil capacity	37.0 gal	140 L
Installation footprint	4.9 ft	1.50 m
Minimum vehicle GVW	50,710 lb	23,000 kg

Need rated capacities at reach?


Capacity changes with reach. Request the certified load chart and a fitment review for your truck before purchase.

(832) 817-2904 · sales@outlastcrane.com · outlastcrane.com



TKA 50.700 C

Outlast Knuckle Boom

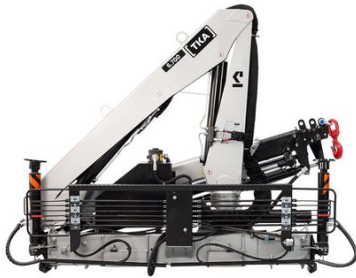

52,910 lb

MAXIMUM RATED CAPACITY

75.1 ft Maximum horizontal reach**87.6 ft** Maximum vertical reach**50,710 lb** Min. vehicle GVW for install

SPECIFICATION	US UNITS	METRIC
Maximum lifting capacity	52,910 lb	24,000 kg
Hydraulic extensions	7	-
Maximum vertical reach	87.6 ft	26.7 m
Maximum horizontal reach	75.1 ft	22.9 m
Hydraulic vertical reach	64.6 ft	19.7 m
Hydraulic horizontal reach	52.2 ft	15.9 m
Front outrigger spread	25.3 ft	7.7 m
Lifting angle	80°	-
Slewing angle	400°	-
Slewing torque	48,750 ft·lbf	6.74 tf·m
Working pressure	4,060 psi	280 bar
Hydraulic oil capacity	66.0 gal	250 L
Transport footprint	5.6 ft	1.7 m
Min. vehicle GVW for install	50,710 lb	23,000 kg
Crane weight (by configuration)	12,170–12,900 lb	5,520–5,850 kg

Need rated capacities at reach?

Capacity changes with reach. Request the certified load chart and a fitment review for your truck before purchase.

(832) 817-2904 • sales@outlastcrane.com • outlastcrane.com



TKA 50.700 Fly Jib

Outlast Knuckle Boom



46,030 lb

MAXIMUM RATED CAPACITY

52.2 ft / 90.6 ft Maximum horizontal reach**66.6 ft / 99.4 ft** Maximum vertical reach**50,710 lb** Min. vehicle GVW for install

SPECIFICATION	US UNITS	METRIC
Maximum lifting capacity	46,030 lb	20,880 kg
Hydraulic extensions	5	-
Maximum vertical reach	66.6 ft / 99.4 ft	20.30 m / 30.30 m
Maximum horizontal reach	52.2 ft / 90.6 ft	15.90 m / 27.63 m
Hydraulic vertical reach	66.6 ft / 96.5 ft	20.30 m / 29.40 m
Hydraulic horizontal reach	52.2 ft / 84.4 ft	15.90 m / 25.74 m
Front outrigger spread	25.3 ft	7.7 m
Lifting angle	80°	-
Slewing angle	400°	-
Slewing torque	48,750 ft·lbf	6.74 tf·m
Working pressure	4,060 psi	280 bar
Hydraulic oil capacity	66.0 gal	250 L
Transport footprint	5.6 ft	1.7 m
Min. vehicle GVW for install	50,710 lb	23,000 kg
Crane weight (by configuration)	12,460–14,550 lb	5,650–6,600 kg

Need rated capacities at reach?

Capacity changes with reach. Request the certified load chart and a fitment review for your truck before purchase.

(832) 817-2904 • sales@outlastcrane.com • outlastcrane.com



TKA 53.900

Outlast Knuckle Boom



52,910 lb

MAXIMUM RATED CAPACITY

76.8 ft Maximum horizontal reach**89.6 ft** Maximum vertical reach**50,710 lb** Min. vehicle GVW for install

SPECIFICATION	US UNITS	METRIC / REFERENCE
Maximum lifting capacity	52,910 lb	24,000 kg
Published own weight	13,340 lb	6,050 kg
Boom configuration	Standard	-
Hydraulic extensions	7	—
Manual extensions	2	—
Maximum vertical reach	89.6 ft	27.30 m
Maximum horizontal reach	76.8 ft	23.40 m
Front stabilizer spread	26.2 ft	See load chart
Boom elevation angle	85°	—
Slewing angle	400°	—
Slewing torque	48,750 ft·lbf	6.74 tf·m
Maximum operating pressure	3,988 psi	275 bar
Hydraulic oil capacity	46.2 gal	175 L
Installation footprint	5.6 ft	1.70 m
Minimum vehicle GVW	50,710 lb	23,000 kg

Need rated capacities at reach?

Capacity changes with reach. Request the certified load chart and a fitment review for your truck before purchase.

(832) 817-2904 · sales@outlastcrane.com · outlastcrane.com



TKA 53.900 Fly Jib

Outlast Knuckle Boom



20,390 lb

MAXIMUM RATED CAPACITY

91.9 ft Maximum horizontal reach**104.7 ft** Maximum vertical reach**50,710 lb** Min. vehicle GVW for install

SPECIFICATION	US UNITS	METRIC / REFERENCE
Maximum lifting capacity	20,390 lb	9,250 kg
Published own weight	14,700 lb	6,670 kg
Boom configuration	Fly Jib	-
Hydraulic extensions	6 + 5 Fly Jib	—
Manual extensions	0	—
Maximum vertical reach	104.7 ft	31.90 m
Maximum horizontal reach	91.9 ft	28.00 m
Front stabilizer spread	26.2 ft	See load chart
Boom elevation angle	85°	—
Slewing angle	400°	—
Slewing torque	48,750 ft·lbf	6.74 tf·m
Maximum operating pressure	3,988 psi	275 bar
Hydraulic oil capacity	46.2 gal	175 L
Installation footprint	5.6 ft	1.70 m
Minimum vehicle GVW	50,710 lb	23,000 kg

Need rated capacities at reach?


Capacity changes with reach. Request the certified load chart and a fitment review for your truck before purchase.

(832) 817-2904 · sales@outlastcrane.com · outlastcrane.com



TKA 66.700 C

Outlast Knuckle Boom

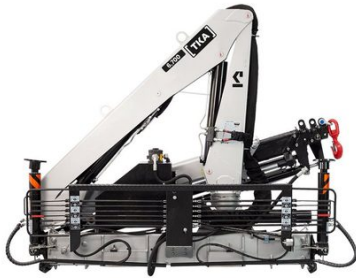

66,380 lb

MAXIMUM RATED CAPACITY

84.0 ft Maximum horizontal reach**95.8 ft** Maximum vertical reach**50,710 lb** Min. vehicle GVW for install

SPECIFICATION	US UNITS	METRIC
Maximum lifting capacity	66,380 lb	30,109 kg
Hydraulic extensions	7	-
Maximum vertical reach	95.8 ft	29.2 m
Maximum horizontal reach	84.0 ft	25.6 m
Hydraulic vertical reach	72.8 ft	22.2 m
Hydraulic horizontal reach	61.0 ft	18.6 m
Front outrigger spread	27.6 ft	8.4 m
Lifting angle	80°	-
Slewing angle	400°	-
Slewing torque	48,750 ft·lbf	6.74 tf·m
Working pressure	4,640 psi	320 bar
Hydraulic oil capacity	66.0 gal	250 L
Transport footprint	5.9 ft	1.8 m
Min. vehicle GVW for install	50,710 lb	23,000 kg
Crane weight (by configuration)	12,630–13,930 lb	5,730–6,320 kg

Need rated capacities at reach?

Capacity changes with reach. Request the certified load chart and a fitment review for your truck before purchase.

(832) 817-2904 · sales@outlastcrane.com · outlastcrane.com



TKA 66.700 C Fly Jib

Outlast Knuckle Boom



62,210 lb

MAXIMUM RATED CAPACITY

60.0 ft / 98.5 ft Maximum horizontal reach**74.5 ft / 110.2 ft** Maximum vertical reach**50,710 lb** Min. vehicle GVW for install

SPECIFICATION	US UNITS	METRIC
Maximum lifting capacity	62,210 lb	28,220 kg
Hydraulic extensions	5	-
Maximum vertical reach	74.5 ft / 110.2 ft	22.70 m / 33.60 m
Maximum horizontal reach	60.0 ft / 98.5 ft	18.30 m / 30.03 m
Hydraulic vertical reach	74.5 ft / 104.0 ft	22.70 m / 31.70 m
Hydraulic horizontal reach	60.0 ft / 92.3 ft	18.30 m / 28.14 m
Front outrigger spread	27.6 ft	8.4 m
Lifting angle	80°	-
Slewing angle	400°	-
Slewing torque	48,750 ft·lbf	6.74 tf·m
Working pressure	4,640 psi	320 bar
Hydraulic oil capacity	66.0 gal	250 L
Transport footprint	5.9 ft	1.8 m
Min. vehicle GVW for install	50,710 lb	23,000 kg
Crane weight (by configuration)	13,430–15,520 lb	6,090–7,040 kg

Need rated capacities at reach?

Capacity changes with reach. Request the certified load chart and a fitment review for your truck before purchase.

(832) 817-2904 • sales@outlastcrane.com • outlastcrane.com



TKA 100.900

Outlast Knuckle Boom



41,890 lb

MAXIMUM RATED CAPACITY

86.3 ft Maximum horizontal reach**103.3 ft** Maximum vertical reach**70,550 lb** Min. vehicle GVW for install

SPECIFICATION	US UNITS	METRIC / REFERENCE
Maximum lifting capacity	41,890 lb	19,000 kg
Published own weight	22,490 lb	10,200 kg
Boom configuration	Standard	-
Hydraulic extensions	9	—
Manual extensions	2	—
Maximum vertical reach	103.3 ft	31.50 m
Maximum horizontal reach	86.3 ft	26.30 m
Front stabilizer spread	27.6 ft	See load chart
Boom elevation angle	85°	—
Slewing angle	Continuous	—
Slewing torque	77,410 ft·lbf	10.7 tf·m
Maximum operating pressure	5,076 psi	350 bar
Hydraulic oil capacity	66.0 gal	250 L
Installation footprint	7.2 ft	2.20 m
Minimum vehicle GVW	70,550 lb	32,000 kg

Need rated capacities at reach?

Capacity changes with reach. Request the certified load chart and a fitment review for your truck before purchase.

(832) 817-2904 · sales@outlastcrane.com · outlastcrane.com



TKA 100.900 Fly Jib

Outlast Knuckle Boom



39,820 lb

MAXIMUM RATED CAPACITY

108.6 ft Maximum horizontal reach**121.7 ft** Maximum vertical reach**70,550 lb** Min. vehicle GVW for install

SPECIFICATION	US UNITS	METRIC / REFERENCE
Maximum lifting capacity	39,820 lb	18,060 kg
Published own weight	24,470 lb	11,100 kg
Boom configuration	Fly Jib	-
Hydraulic extensions	9 + 5 Fly Jib	—
Manual extensions	0	—
Maximum vertical reach	121.7 ft	37.10 m
Maximum horizontal reach	108.6 ft	33.10 m
Front stabilizer spread	27.6 ft	See load chart
Boom elevation angle	85°	—
Slewing angle	Continuous	—
Slewing torque	77,410 ft·lbf	10.7 tf·m
Maximum operating pressure	5,076 psi	350 bar
Hydraulic oil capacity	66.0 gal	250 L
Installation footprint	7.2 ft	2.20 m
Minimum vehicle GVW	70,550 lb	32,000 kg

Need rated capacities at reach?

Capacity changes with reach. Request the certified load chart and a fitment review for your truck before purchase.

(832) 817-2904 · sales@outlastcrane.com · outlastcrane.com



TKA 18.5 S/SI/SDI

Outlast Aerial Lifts



300 lb

MAXIMUM RATED CAPACITY

26.2 ft Maximum horizontal reach**60.7 ft** Maximum working height**24,250 lb** Min. vehicle GVW for install

SPECIFICATION	US UNITS	METRIC
Basket (platform) capacity	300 lb	136 kg
Maximum working height	60.7 ft	18.5 m
Max basket-floor height	55.8 ft	17.0 m
Maximum horizontal reach	26.2 ft	8.0 m
Lower-boom max angle	105°	-
Upper-boom max angle	180°	-
Continuous rotation	360°	-
Outriggers	2 pairs, Type A	-
Working pressure	3,190 psi	220 bar
Oil flow	3.7 gal/min	14 L/min
Tank capacity	14.5 gal	55 L
Transport height	9.7 ft	2.95 m
Equipment length	26.1 ft	7.96 m
Min. wheelbase	15.7 ft	4.8 m
Min. vehicle GVW for install	24,250 lb	11,000 kg
Equipment weight (by version)	4,440 lb	2,015 kg

Need rated capacities at reach?

Capacity changes with reach. Request the certified load chart and a fitment review for your truck before purchase.

(832) 817-2904 • sales@outlastcrane.com • outlastcrane.com



TKA 18.5 D/Di/DDi

Outlast Aerial Lifts



300 lb

MAXIMUM RATED CAPACITY

26.2 ft Maximum horizontal reach**60.7 ft** Maximum working height**24,250 lb** Min. vehicle GVW for install

SPECIFICATION	US UNITS	METRIC
Basket (platform) capacity	600 lb	272 kg
Maximum working height	60.7 ft	18.5 m
Max basket-floor height	55.8 ft	17.0 m
Maximum horizontal reach	26.2 ft	8.0 m
Lower-boom max angle	105°	-
Upper-boom max angle	180°	-
Continuous rotation	360°	-
Outriggers	2 pairs, Type A	-
Working pressure	3,190 psi	220 bar
Oil flow	3.7 gal/min	14 L/min
Tank capacity	14.5 gal	55 L
Transport height	9.7 ft	2.95 m
Equipment length	26.1 ft	7.96 m
Min. wheelbase	15.7 ft	4.8 m
Min. vehicle GVW for install	24,250 lb	11,000 kg
Equipment weight (by version)	4,810 lb	2,180 kg

Need rated capacities at reach?

Capacity changes with reach. Request the certified load chart and a fitment review for your truck before purchase.

(832) 817-2904 • sales@outlastcrane.com • outlastcrane.com



TKA 15.5 S/SI/SDI

Outlast Aerial Lifts



300 lb

MAXIMUM RATED CAPACITY

21.3 ft Maximum horizontal reach**50.9 ft** Maximum working height**22,050 lb** Min. vehicle GVW for install

SPECIFICATION	US UNITS	METRIC
Basket (platform) capacity	300 lb	136 kg
Maximum working height	50.9 ft	15.5 m
Max basket-floor height	45.9 ft	14.0 m
Maximum horizontal reach	21.3 ft	6.5 m
Lower-boom max angle	105°	-
Upper-boom max angle	180°	-
Continuous rotation	360°	-
Outriggers	2 pairs, Type A	-
Working pressure	2,900 psi	200 bar
Oil flow	3.7 gal/min	14 L/min
Tank capacity	14.5 gal	55 L
Transport height	9.7 ft	2.95 m
Equipment length	21.2 ft	6.46 m
Min. wheelbase	13.1 ft	4.0 m
Min. vehicle GVW for install	22,050 lb	10,000 kg
Equipment weight (by version)	4,210–4,280 lb	1,910–1,940 kg

Need rated capacities at reach?

Capacity changes with reach. Request the certified load chart and a fitment review for your truck before purchase.

(832) 817-2904 • sales@outlastcrane.com • outlastcrane.com



TKA 15.5 D/Di/DDi

Outlast Aerial Lifts



600 lb

MAXIMUM RATED CAPACITY

21.3 ft Maximum horizontal reach**50.9 ft** Maximum working height**22,050 lb** Min. vehicle GVW for install

SPECIFICATION	US UNITS	METRIC
Basket (platform) capacity	600 lb	272 kg
Maximum working height	50.9 ft	15.5 m
Max basket-floor height	45.9 ft	14.0 m
Maximum horizontal reach	21.3 ft	6.5 m
Lower-boom max angle	105°	-
Upper-boom max angle	180°	-
Continuous rotation	360°	-
Outriggers	2 pairs, Type A	-
Working pressure	3,190 psi	220 bar
Oil flow	3.7 gal/min	14 L/min
Tank capacity	14.5 gal	55 L
Transport height	9.7 ft	2.95 m
Equipment length	21.2 ft	6.46 m
Min. wheelbase	13.1 ft	4.0 m
Min. vehicle GVW for install	22,050 lb	10,000 kg
Equipment weight (by version)	4,480–4,540 lb	2,030–2,060 kg

Need rated capacities at reach?

Capacity changes with reach. Request the certified load chart and a fitment review for your truck before purchase.

(832) 817-2904 • sales@outlastcrane.com • outlastcrane.com



TKA 10 S/Si

Outlast Aerial Lifts



300 lb

MAXIMUM RATED CAPACITY

16.4 ft Maximum horizontal reach**32.8 ft** Maximum working height**5,510 lb** Min. vehicle GVW for install

SPECIFICATION	US UNITS	METRIC
Basket (platform) capacity	300 lb	136 kg
Maximum working height	32.8 ft	10.0 m
Max basket-floor height	27.9 ft	8.5 m
Maximum horizontal reach	16.4 ft	5.0 m
Lower-boom max angle	90°	-
Upper-boom max angle	172°	-
Continuous rotation	360°	-
Outriggers	1 pair, Type A	-
Working pressure	2,610 psi	180 bar
Oil flow	3.7 gal/min	14 L/min
Tank capacity	5.8 gal	22 L
Transport height	6.9 ft	2.1 m
Equipment length	14.1 ft	4.3 m
Min. wheelbase	7.9 ft	2.4 m
Min. vehicle GVW for install	5,510 lb	2,500 kg
Equipment weight (by version)	1,880 lb	855 kg

Need rated capacities at reach?

Capacity changes with reach. Request the certified load chart and a fitment review for your truck before purchase.

(832) 817-2904 • sales@outlastcrane.com • outlastcrane.com



TKA 13.5 S/SI/SDI

Outlast Aerial Lifts



300 lb

MAXIMUM RATED CAPACITY

21.3 ft Maximum horizontal reach**44.3 ft** Maximum working height**8,820 lb** Min. vehicle GVW for install

SPECIFICATION	US UNITS	METRIC
Basket (platform) capacity	300 lb	136 kg
Maximum working height	44.3 ft	13.5 m
Max basket-floor height	39.4 ft	12.0 m
Maximum horizontal reach	21.3 ft	6.5 m
Lower-boom max angle	90°	-
Upper-boom max angle	172°	-
Continuous rotation	360°	-
Outriggers	2 pairs, Type A	-
Working pressure	2,610 psi	180 bar
Oil flow	3.7 gal/min	14 L/min
Tank capacity	11.1 gal	42 L
Transport height	7.2 ft	2.2 m
Equipment length	19.4 ft	5.9 m
Min. wheelbase	9.8 ft	3.0 m
Min. vehicle GVW for install	8,820 lb	4,000 kg
Equipment weight (by version)	2,310–2,390 lb	1,050–1,085 kg

Need rated capacities at reach?

Capacity changes with reach. Request the certified load chart and a fitment review for your truck before purchase.

(832) 817-2904 • sales@outlastcrane.com • outlastcrane.com



TKA 13.5 D/Di/DDi

Outlast Aerial Lifts



600 lb

MAXIMUM RATED CAPACITY

21.3 ft Maximum horizontal reach**44.3 ft** Maximum working height**8,820 lb** Min. vehicle GVW for install

SPECIFICATION	US UNITS	METRIC
Basket (platform) capacity	600 lb	272 kg
Maximum working height	44.3 ft	13.5 m
Max basket-floor height	42.7 ft	13.0 m
Maximum horizontal reach	21.3 ft	6.5 m
Lower-boom max angle	90°	-
Upper-boom max angle	172°	-
Continuous rotation	360°	-
Outriggers	2 pairs, Type A	-
Working pressure	2,610 psi	180 bar
Oil flow	3.7 gal/min	14 L/min
Tank capacity	11.1 gal	42 L
Transport height	7.2 ft	2.2 m
Equipment length	19.4 ft	5.9 m
Min. wheelbase	9.8 ft	3.0 m
Min. vehicle GVW for install	8,820 lb	4,000 kg
Equipment weight (by version)	2,580–2,760 lb	1,170–1,250 kg

Need rated capacities at reach?

Capacity changes with reach. Request the certified load chart and a fitment review for your truck before purchase.

(832) 817-2904 • sales@outlastcrane.com • outlastcrane.com



TKA 13.5 ATi

Outlast Aerial Lifts



300 lb

MAXIMUM RATED CAPACITY

28.5 ft Maximum horizontal reach**44.3 ft** Maximum working height**13,230 lb** Min. vehicle GVW for install

SPECIFICATION	US UNITS	METRIC
Basket (platform) capacity	300 lb	136 kg
Maximum working height	44.3 ft	13.5 m
Max basket-floor height	39.4 ft	12.0 m
Maximum horizontal reach	28.5 ft	8.7 m
Lower-boom max angle	90°	-
Upper-boom max angle	-27°	-
Continuous rotation	360°	-
Outriggers	2 pairs, Type A	-
Working pressure	2,610 psi	180 bar
Oil flow	3.7 gal/min	14 L/min
Tank capacity	11.1 gal	42 L
Transport height	11.8 ft	3.6 m
Equipment length	17.4 ft	5.3 m
Min. wheelbase	13.1 ft	4.0 m
Min. vehicle GVW for install	13,230 lb	6,000 kg
Equipment weight (by version)	3,200 lb	1,450 kg

Need rated capacities at reach?

Capacity changes with reach. Request the certified load chart and a fitment review for your truck before purchase.

(832) 817-2904 • sales@outlastcrane.com • outlastcrane.com



TKA 1.000 BX

Outlast BX Line



330 lb

MAXIMUM RATED CAPACITY

9.8 ft Maximum horizontal reach**16.1 ft** Maximum vertical reach**190°** Slewing angle

SPECIFICATION	US UNITS	METRIC
Total load capacity (grab + load)	330 lb	150 kg
Maximum vertical reach	16.1 ft	4.9 m
Maximum horizontal reach	9.8 ft	3.0 m
Lifting angle	62°	-
Slewing angle	190°	-
Slewing torque	2,100 ft·lbf	0.29 tf·m
Working pressure	2,180 psi	150 bar
Weights (crane / fixing / grab)	110–440 lb	50–200 kg

Need rated capacities at reach?

Capacity changes with reach. Request the certified load chart and a fitment review for your truck before purchase.

(832) 817-2904 · sales@outlastcrane.com · outlastcrane.com



TKA 3.200 BX

Outlast BX Line



4,370 lb

MAXIMUM RATED CAPACITY

21.0 ft Maximum horizontal reach**28.9 ft** Maximum vertical reach**7,720 lb** Min. vehicle GVW for install

SPECIFICATION	US UNITS	METRIC
Maximum lifting capacity	4,370 lb	1,980 kg
Hydraulic extensions	3	-
Maximum vertical reach	28.9 ft	8.8 m
Maximum horizontal reach	21.0 ft	6.4 m
Hydraulic vertical reach	20.7 ft	6.3 m
Hydraulic horizontal reach	12.5 ft	3.8 m
Front outrigger spread	9.5 ft	2.9 m
Lifting angle	70°	-
Slewing angle	360°	-
Slewing torque	2,100 ft·lbf	0.29 tf·m
Working pressure	3,190 psi	220 bar
Hydraulic oil capacity	6.6 gal	25 L
Transport footprint	1.6 ft	0.5 m
Min. vehicle GVW for install	7,720 lb	3,500 kg
Crane weight (by configuration)	1,090–1,120 lb	495–510 kg

Need rated capacities at reach?

Capacity changes with reach. Request the certified load chart and a fitment review for your truck before purchase.

(832) 817-2904 • sales@outlastcrane.com • outlastcrane.com



TKA 8.700 BX

Outlast BX Line



9,920 lb

MAXIMUM RATED CAPACITY

26.9 ft Maximum horizontal reach**35.8 ft** Maximum vertical reach**190°** Slewing angle

SPECIFICATION	US UNITS	METRIC
Total load capacity (grab + load)	9,920 lb	4,500 kg
Maximum vertical reach	35.8 ft	10.9 m
Maximum horizontal reach	26.9 ft	8.2 m
Lifting angle	72°	-
Slewing angle	190°	-
Slewing torque	2,100 ft·lbf	0.29 tf·m
Working pressure	2,180 psi	150 bar
Weights (crane / fixing / grab)	110–440 lb	50–200 kg

Need rated capacities at reach?

Capacity changes with reach. Request the certified load chart and a fitment review for your truck before purchase.

(832) 817-2904 · sales@outlastcrane.com · outlastcrane.com